


For Flooring & Paving - Protects, Preserves, Colours, Hardens, Enhances

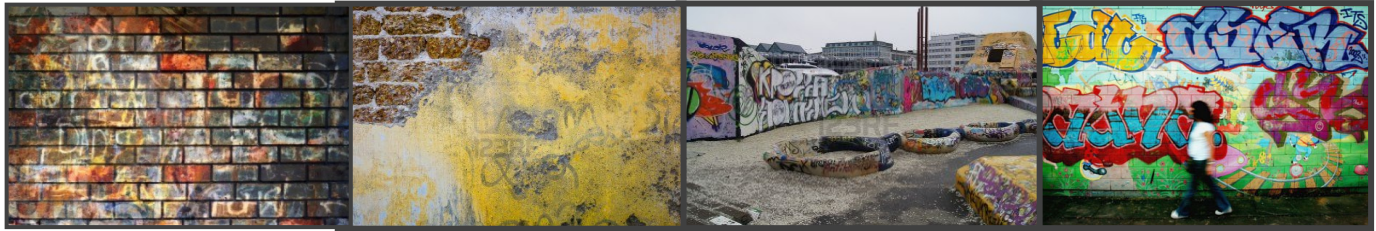

PRODUCT DESCRIPTION

Adseal Anti Graffiti Coating is a specially formulated water based coating that resists graffiti and does not allow either spray paint or marker pen to penetrate and damage the surface.

It is ideal for the protection of masonry such as concrete, brickwork, limestone, sandstone, render, etc., to preserve their natural beauty.

Adseal Anti Graffiti Coating's strong UV and weather resistance prevents yellowing and will not crack or peel.

Graffiti is easily removed using just a standard cold water pressure washer on most surfaces.

THE SYSTEM

SPECIAL PROPERTIES.

A colourless, non yellowing, & UV stable concentrate, low viscosity product. Dilute with potable water to level shown on container.

Adseal Anti Graffiti Coating is ideal for many surfaces such as concrete, masonry, brickwork, sandstone, limestone, etc..

Its special properties enable it to resist heavy graffiti and as a water based product it is safe to use and Environmentally friendly.

MAIN APPLICATIONS

SHOPPING PRECINCTS
PARKS & GARDENS
CITY CENTRES
HOTELS, GOLF CLUBS, ETC.
VERTICAL & HORIZONTAL SURFACES

PERFORMANCE

A major advantage is that, unlike many products, Adseal Anti Graffiti Coating is only partially self sacrificial which means graffiti can be cleaned off several times before having to recoat resulting in reduced 'whole life' costs.

FEATURES/BENEFITS

- Environmentally friendly water based product
- Suitable for most uncoated/unsealed surfaces & is easy to apply
- Chemical removal unnecessary on most surfaces
- Resists even heavy graffiti
- Excellent UV & weather resistance
- Virtually invisible & non yellowing
- Will not crack, flake or peel

TECHNICAL DATA

Appearance:	Yellow viscous liquid concentrate
Ionic nature:	Cationic
Ph:	4 - 5.5
Coverage:	approx. 10m ² per ltr per coat dilute depending on surface porosity
Flash point:	>100°C
Boiling Point:	About 100°C
Solids content:	Not exceeding 25%
Application Temperature:	Min +10°C max + 25°C
UV resistance:	Excellent
Classification:	Not classified as hazardous [see Safety Data Sheet MSDS81]
Shelf life:	12months unopened. 7 days once diluted
Packaging:	To make 1 litre, 2.5 litre & 5 litre
Shipping Specification:	Not classified as hazardous
Equipment Cleaning:	Clean water
Storage:	Under cover and protect from extremes of temperature. If frozen allow to return to room temperature and stir thoroughly

APPLICATION

Supplied concentrated. Dilute with potable water to level shown on container.

Apply by low pressure/airless sprayer, saturated bush, roller. The application is simple with roller and brush marks almost imperceptible.

WEATHER

Do not apply if rain is expected.

Do not apply if temperature is below 10°C or humidity is above 85%

SURFACE PREPARATION

Ensure all surfaces are clean and free from oils, residue, dirt or other contaminants. Let surface dry after cleaning

LOW-POROSITY SURFACES

Apply 1-2 coats taking care to avoid drips and runs. Apply the second coat wet on wet, however by no more than 10-20 minutes

HIGH-POROSITY SURFACES

Apply 2-3 coats taking care to avoid drips and runs. Apply the second and third coat wet on wet, however by no more than 10-20 minutes.

The above to be read in conjunction with the detailed Installation Instructions Sheet and the current Safety Data Sheet available as a hard copy or to download from www.adseal.info

GRAFFITI REMOVAL

Removal should be performed using high pressure water cleaning equipment. Hot water/steam equipment & chemicals are NOT USUALLY required.

Extreme care should be taken not to etch and damage soft surfaces such as limestone when using high pressure cleaning equipment

MAINTENANCE

Should signs of wear appear after cleaning off graffiti several times, then a maintenance coat can be applied. Clean and thoroughly dry surface to be treated. Apply further coats as necessary

SPECIFICATION CLAUSE

The designated surface shall be coated with Adseal Anti Graffiti Coating at a rate of approx. 10 square metres per litre per coat in Coats as supplied by Adseal, Units 17 – 18 Raikes Clough Industrial Estate, Raikes Lane, Bolton, BL3 1RP. The coating should be applied with an approved airless sprayer and all work carried out in accordance with the suppliers current 'Product Information' and 'Installation Instruction Sheet'.

OR

'The designated surface shall be coated with Adseal Anti Graffiti Coating at a rate of approx. 10 square metres per litre per coat in Coats as supplied by Adseal, Units 17 – 18 Raikes Clough Industrial Estate, Raikes Lane, Bolton, BL3 1RP. The coating should be applied with an approved airless sprayer and all work carried out by an Adseal 'Approved Installer'.

TECH SUPPORT

We have extensive practical expertise and technical knowledge to share with you. Whether you are sealing for the first time, or an experienced installer or professional Specifier with a technical query, please call us on +44 (0) 1204 523973 or email: support@adsealcontracts.co.uk - we are here to help